



CORIOLIS MASS FLOW AND DENSITY METER FOR MARINE FUEL CONSUMPTION MANAGEMENT

- Customized installation length
- Direct mass flow measurement
- Real time density measurement for fuel quality control
- Maintenance free
- No moving parts
- Replaces all kind of volume based flow meters
- Excellent repeatability in order to determine actions for process/engine optimization
- Recommended 5 year meter recalibration

ACCURACY¹⁾

Basic Accuracy (Mass Flow) ²⁾ :	±0.3 % (option: up to ±0.1 %) of flow rate
Repeatability (Mass Flow):	±0.05 % of flow rate
Basic Accuracy (Volume Flow) ²⁾ :	±0.3 % (option: up to ±0.15 %) of flow rate
Repeatability (Volume Flow):	±0.05 % of flow rate
Zero Stability:	±0.01 % of full scale

DENSITY

Density Range:	up to 2,500 kg/m ³ [2.5 g/cm ³]
Density Accuracy ²⁾ :	±1.0 kg/m ³ [±0.001 g/cm ³]
Density Repeatability:	±0.5 kg/m ³ [±0.0005 g/cm ³]

TEMPERATURE

Process Temperature Range:	-40 °C ... +100 °C [-40 °F ... +212 °F] Option: -60 °C ... +150 °C [-76 °F ... +302 °F] -60 °C ... +200 °C [-76 °F ... +392 °F]
Temperature Accuracy:	±1 °C ±0.5 % of reading [±1.8 °F ±0.5 % of reading]
Temperature Repeatability:	±0.2 °C [±0.36 °F]

MATERIALS (WETTED PARTS)

Tubes:	1.4404 [AISI 316L]
Case:	1.4404 [AISI 316L]
Flow Splitter:	1.4404 [AISI 316L]
Brazing Alloy:	BNI-2

TYPICAL SPECIFICATION:


Nominal Meter Size:	G½" thread
---------------------	------------



¹⁾ Stated flow accuracy combines the effects of repeatability, linearity and hysteresis.
²⁾ The specifications refer to standard conditions (for further information see TCM CLASSIC series manual).



CLASSIC Series | TCM 3100 Coriolis Mass Flow Meter

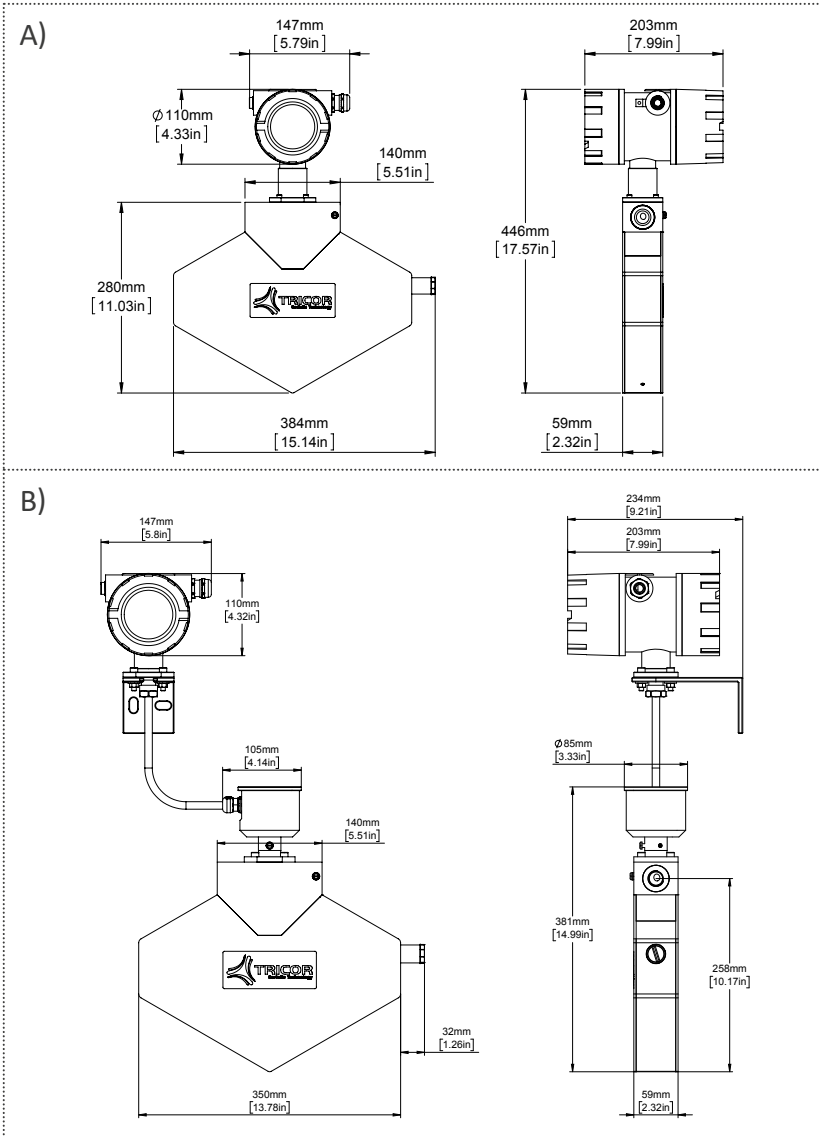

METER DIMENSIONS³⁾ AND WEIGHTS

A) Compact Version

Weight: 11.6 kg [25.6 lb]
 With meter mount in aluminum diecast housing
 Process Connection:
 G $\frac{1}{2}$ " thread (others on request)

B) Remote Version

Weight: 12.9 kg [28.4 lb]
 With junction box and remote field mount
 Process Connection:
 standard meter connection according table

APPROVALS & CERTIFICATIONS

Hazardous area (Ex)

ATEX Zone 1 IECEx	Compact version: II 2G Ex db ia IIC T4 Gb Remote version⁹⁾: Sensor: II 1G Ex ia IIC T4...T2 Ga Transm.: II 2(1)G Ex db [ia Ga] IIC T4 Gb
Atex Zone 2 cCSAus ⁵⁾	All versions: II 3G Ex nA IIC T4 Compact version: Cl. 1, Div. 1, Group A-D: T4 (US, Can) Ex db ia IIC T4 Gb (Can) Remote version⁹⁾: Sensor: Cl. 1, Div. 1, Group A-D: T4...T2 (US, Can) Ex ia IIC T4...T2 Ga (Can) Transm.: Cl. 1, Div. 1, Group A-D: T4 (US, Can) Ex db [ia Ga] IIC T4 Gb (Can)
EAC (TR-CU)	Compact version: 1Ex d ia IIC T4 Gb X Remote version⁹⁾: Sensor: 0Ex ia IIC T4...T2 Ga X Transm.: 1Ex d [ia Ga] IIC T4 Gb X
KGS (Korean)	Compact version: Ex d [ia] IIC T4 Remote version⁹⁾: Sensor: Ex ia IIC T4 Transm.: Ex d [ia] IIC T4

PANEL MOUNT⁶⁾



REMOTE MOUNT⁷⁾



ELECTRONICS

Power Supply: 24 V DC or 100 ... 240 V AC (version dependent)
 Outputs: Analog, Frequency, Pulse, Status
 Interfaces: RS485 RTU (Modbus), HART®
 Cable Gland: M20 | ½" NPT

www.tricorflow.com

Product Type Approval

American Bureau of Shipping	Certificate Number: 14-HS1223473-PDA-DUP
RMRS	Russian Maritime Register of Shipping

³⁾ Drawing of the Meter Dimensions reflects one standard connection, other connections on request (Installation length can vary depending on selected connection).

⁴⁾ For cCSAus the electronic is only available in aluminum housing.

⁵⁾ Only wall mounting, not panel mounting.

⁶⁾ Weight: 0.4 kg [0.88 lb].

⁷⁾ Weight with aluminum diecast housing: 3.8 kg [8.4 lb] with 3 m cable, Weight with 1.4404 [AISI 316L] housing: 6.15 kg [13.56 lb].

NORTH & SOUTH AMERICA
 AW-Lake Company
 2440 W. Corporate Preserve Dr. #600
 Oak Creek WI 53154 | USA
 +1 414 574 4300

KEM Küppers Elektromechanik GmbH
 Liebigstraße 5
 85757 Karlsfeld | Germany
 +49 8131 59391-0

CHINA
 KEM flow technology (Beijing) Co., Ltd.
 Rm. 906, Block C, Ruiipu Office Bldg, No. 15
 HongJunYingNan Road
 Chaoyang District, Beijing 100012 | China
 +86 10 84929567




EUROPE (ROW)
 KEM Küppers Elektromechanik GmbH
 Liebigstraße 5
 85757 Karlsfeld | Germany
 +49 8131 59391-100



PROCESS CONNECTION

Model Code	ANSI B16.5 or DIN EN 1092-1 Form B	Face-to-Face (mm)	Flange - ϕ (mm)	Screws QTY	Hole - ϕ for screws (mm) or screw dim.
AA	0.5" CL 150 ANSI	420	90	4	16
AB	0.5" CL 300 ANSI	420	95	4	16
AC	0.5" CL 600 ANSI	420	95	4	16
AD	0.5" CL 900 ANSI	420	120	4	22
AE	1.0" CL 150 ANSI	420	110	4	16
AF	1.0" CL 300 ANSI	420	95	4	19
AG	1.0" CL 600 ANSI	420	125	4	19
AH	1.0" CL 900 ANSI	420	150	4	25
DA	DN15 PN40 EN 1092-1 Form B1	420	95	4	M12
DB	DN15 PN100 EN 1092-1 Form B1	420	105	4	M12
DC	DN25 PN40 EN 1092-1 Form B1	420	115	4	M12
DD	DN25 PN100 EN 1092-1 Form B1	420	140	4	M16

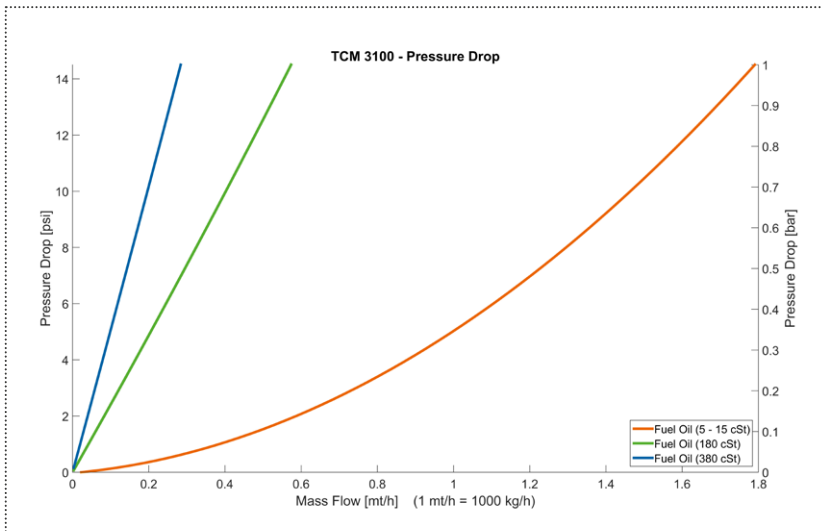

PRESSURE DROP

Range	Fuel Oil		
Viscosity (cSt)	5-15	180	380
Density (kg/m ³)	900	900	900
Flow Rate (mt/h)	1.8	0.58	0.29
Pressure Drop (bar/psi)	1 [14.5]		

www.tricorflow.com



NORTH & SOUTH AMERICA
 AW-Lake Company
 2440 W. Corporate Preserve Dr. #600
 Oak Creek WI 53154 | USA
 +1 414 574 4300

ASIA PACIFIC & MIDDLE EAST
 KEM Küppers Elektromechanik GmbH
 Liebigstraße 5
 85757 Karlsfeld | Germany
 +49 8131 59391-0

CHINA
 KEM flow technology (Beijing) Co., Ltd.
 Rm. 906, Block C, Ruiipu Office Bldg, No. 15
 HongJunYingNan Road
 Chaoyang District, Beijing 100012 | China
 +86 10 84929567

EUROPE (ROW)
 KEM Küppers Elektromechanik GmbH
 Liebigstraße 5
 85757 Karlsfeld | Germany
 +49 8131 59391-100