


# Technical Datasheet

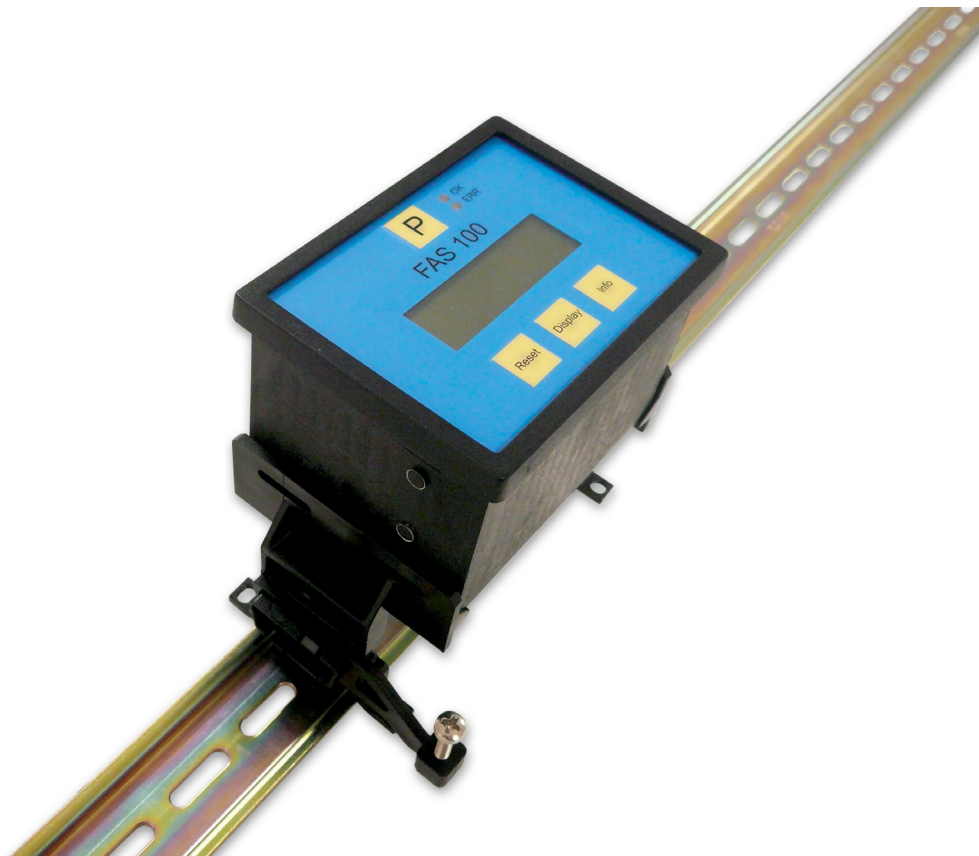

**HSA**

DIN rail adaptor

## Description

The DIN rail adaptors of the series HSA are for mounting units with panel mount housings on a DIN rail.  
When using the adaptors, enough place is left between the housing and the DIN rail for the connecting cables.

## Operation

The complete set consists of 2 adaptors, 4 screws M2x12, 8 washers M2 and eventually 2 additional holders.  
Turn the panel mount housing upside down and remove the 2 screws on one side of the back panel.  
Fix 1 adaptor with 2 screws M2x12 and 4 washers (each 2 above and below the adaptor) to the housing.  
Connect the second adaptor the same way.  
Connect the cables and clip the adaptors on the DIN rail.

## Ordering Information

HSA 72	For FAS 100
HSA 96	For TCE 8000 (panel housing)



### KEM Headquarters

Liebigstraße 5  
85757 Karlsfeld  
Germany

T. +49 8131 59391-0  
F. +49 8131 92604

info@kem-kueppers.com

### KEM Manufacturing Center

Wetzeller Straße 22  
93444 Bad Kötzing  
Germany

T. +49 9941 9423-0  
F. +49 9941 9423-23

production@kem-kueppers.com

### KEM Sales

Liebigstraße 5  
85757 Karlsfeld  
Germany

T. +49 8131 59391-100  
F. +49 8131 92604

sales@kem-kueppers.com

### KEM Service & Repairs

Wetzeller Straße 22  
93444 Bad Kötzing  
Germany

T. +49 9941 9423-37  
F. +49 9941 9423-24

service@kem-kueppers.com

*More distributors & partners can be found at:  
[www.kem-kueppers.com](http://www.kem-kueppers.com)*