



FEATURES

- Robust, no moving parts for long life
- Custom flow connectors & installation lengths
- Excellent repeatability ($\pm 0.05\%$ of flow rate)
- High pressure option: 345 bar [5,000 psi]¹⁾

BENEFITS

- ▶ Increased productivity, lower maintenance
- ▶ Lower installation cost
- ▶ Increased product quality
- ▶ Broad applications: dosing, paint, chemical injection

FLOW RATE

Mass Flow Rate (max.): 325 kg/h [12 lb/min]
 Volumetric Flow Rate (max.): 325 l/h [1.43 gpm, 49 oil bbl/d (US)]
 Nominal Meter Size: DN4 [$\frac{1}{8}$ "]

PRESSURE RATING

200 bar [2,900 psi]
 (option: up to 345 bar [5,000 psi])¹⁾

ACCURACY (LIQUIDS)²⁾

Basic Accuracy (Mass Flow)³⁾: $\pm 0.3\%$ (option: up to $\pm 0.1\%$ of flow rate)
 Repeatability (Mass Flow): $\pm 0.05\%$ of flow rate
 Basic Accuracy (Volume Flow)³⁾: $\pm 0.3\%$ (option: up to $\pm 0.15\%$ of flow rate)
 Repeatability (Volume Flow): $\pm 0.05\%$ of flow rate
 Zero Stability: $\pm 0.01\%$ of full scale

ACCURACY (GASES)

Basic Accuracy (Mass Flow)³⁾: $\pm 1\%$ (option: up to $\pm 0.5\%$ of flow rate)
 Repeatability (Mass Flow): $\pm 0.25\%$ of flow rate

DENSITY


Density Range: up to 2,500 kg/m³ [2.5 g/cm³]
 Density Accuracy³⁾: ± 1.0 kg/m³ [± 0.001 g/cm³]
 Density Repeatability: ± 0.5 kg/m³ [± 0.0005 g/cm³]

TEMPERATURE

Process Temperature Range: -40 °C ... +100 °C [-40 °F ... +212 °F]
 Option:
 -60 °C ... +200 °C [-76 °F ... +392 °F]
 Temperature Accuracy: ± 1 °C $\pm 0.5\%$ of reading
 [± 1.8 °F $\pm 0.5\%$ of reading]
 Temperature Repeatability: ± 0.2 °C [± 0.36 °F]

MATERIALS (WETTED PARTS)

Tubes: 1.4404 [AISI 316L]
 Case: 1.4404 [AISI 316L]
 Flow Splitter: 1.4404 [AISI 316L]
 Brazing Alloy: BNi-2

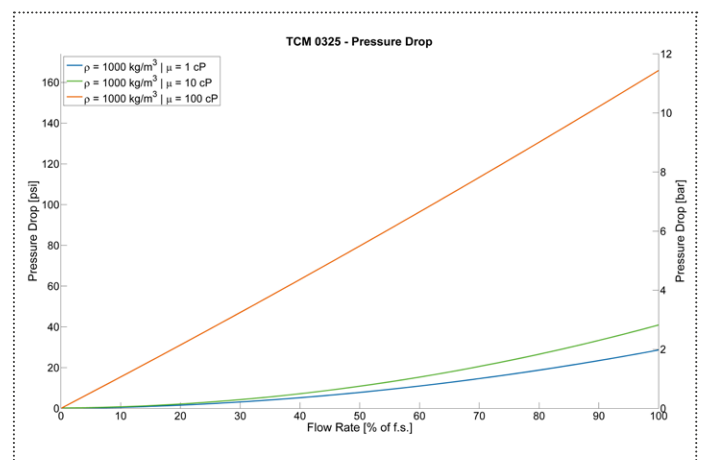


¹⁾ The 200 bar standard pressure rating is per ASME. The 345 bar option is non-ASME rated.

²⁾ Stated flow accuracy combines the effects of repeatability, linearity and hysteresis.

³⁾ The specifications refer to standard conditions (for further information see TCM CLASSIC series manual).



CLASSIC Series | TCM 0325 Coriolis Mass Flow Meter

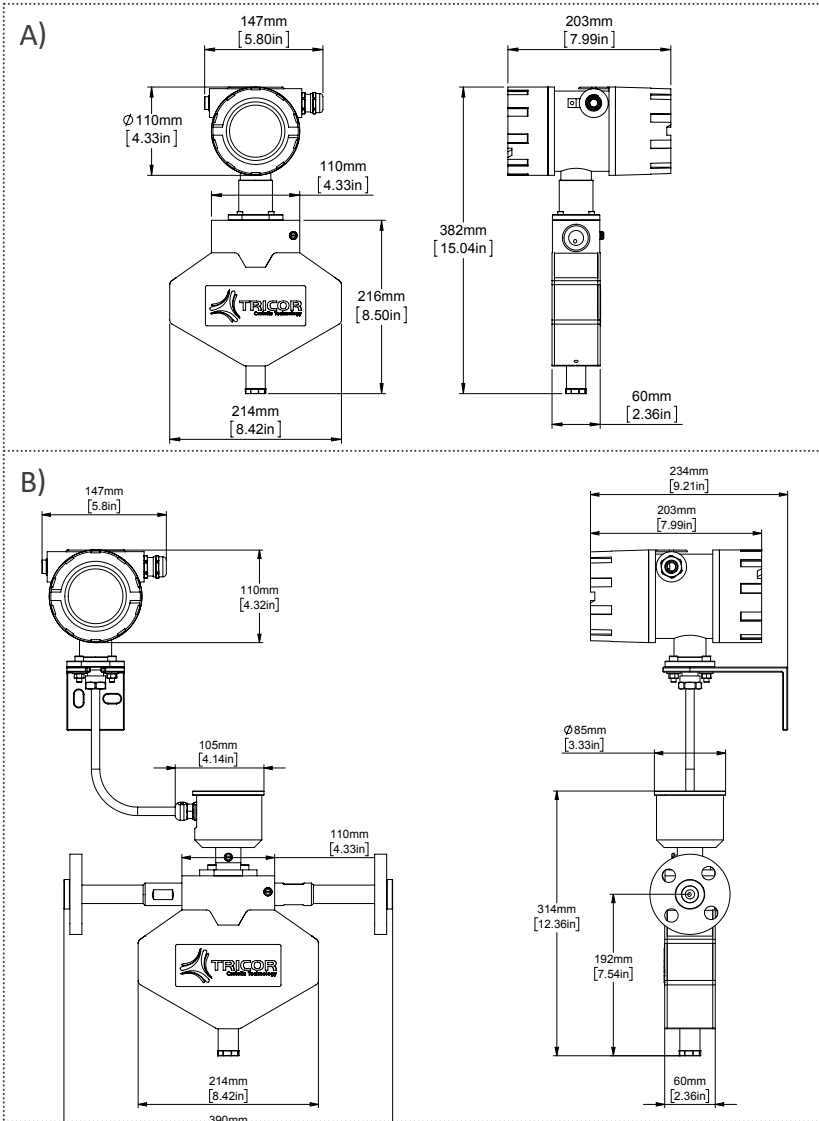

METER DIMENSIONS⁴⁾ AND WEIGHTS

A) Compact Version

Weight: 7 kg [15.4 lb]
With meter mount in aluminum diecast housing

B) Remote Version

Weight: 8.3 kg [18.3 lb]
With junction box and remote field mount

Standard Process Connection

G $\frac{1}{2}$ " thread (others on request)

APPROVALS & CERTIFICATIONS

ATEX Zone 1 IECEX	Compact version: II 2G Ex db ia IIC T4 Gb Remote version⁶⁾: Sensor: II 1G Ex ia IIC T4...T2 Ga Transm.: II 2(1)G Ex db [ia Ga] IIC T4 Gb
Atex Zone 2 cCSAus ⁵⁾	All versions: II 3G Ex nA IIC T4 Compact version: Cl. 1, Div. 1, Group A-D: T4 (US, Can) Ex db ia IIC T4 Gb (Can) Remote version⁶⁾: Sensor: Cl. 1, Div. 1, Group A-D: T4...T2 (US, Can) Ex ia IIC T4...T2 Ga (Can) Transm.: Cl. 1, Div. 1, Group A-D: T4 (US, Can) Ex db [ia Ga] IIC T4 Gb (Can)
EAC (TR-CU)	Compact version: 1Ex d ia IIC T4 Gb X Remote version⁶⁾: Sensor: 0Ex ia IIC T4...T2 Ga X Transm.: 1Ex d [ia Ga] IIC T4 Gb X
KGS (Korean)	Compact version: Ex d [ia] IIC T4 Remote version⁶⁾: Sensor: Ex ia IIC T4 Transm.: Ex d [ia] IIC T4

PANEL MOUNT⁷⁾



REMOTE MOUNT⁸⁾



ELECTRONICS

Power Supply: 24 V DC or 100 ... 240 V AC (version dependent)
Outputs: Analog, Frequency, Pulse, Status
Interfaces: RS485 RTU (Modbus), HART[®]
Cable Gland: M20 | $\frac{1}{2}$ " NPT

⁴⁾ Drawing of the Meter Dimensions reflects one standard connection, other connections on request (Installation length can vary depending on selected connection).

⁵⁾ For cCSAus the electronic is only available in aluminum housing.

⁶⁾ Only wall mounting, not panel mounting.

⁷⁾ Weight: 0.4 kg [0.88 lb].

⁸⁾ Weight with aluminum diecast housing: 3.8 kg [8.4 lb] with 3 m cable, Weight with 1.4404 [AISI 316L] housing: 6.15 kg [13.56 lb].

www.tricorflow.com



NORTH & SOUTH AMERICA
AW-Lake Company
2440 W. Corporate Preserve Dr. #600
Oak Creek WI 53154 | USA
+1 414 574 4300

ASIA PACIFIC & MIDDLE EAST
KEM Küppers Elektromechanik GmbH
Liebigstraße 5
85757 Karlsfeld | Germany
+49 8131 59391-0

CHINA
KEM flow technology (Beijing) Co., Ltd.
Rm. 906, Block C, Ruiipu Office Bldg, No. 15
HongJunYingNan Road
Chaoyang District, Beijing 100012 | China
+86 10 84929567

EUROPE (ROW)
KEM Küppers Elektromechanik GmbH
Liebigstraße 5
85757 Karlsfeld | Germany
+49 8131 59391-100